


ARDEX TLT™ SHOWER SYSTEMS


Premium and high-performance shower bases, drain kits, building panels and waterproofing accessories

ARDEX TLT™ Building Panels

ARDEX TLT™ Building Panels offer builders and tile contractors a strong, lightweight, waterproof, and vapor-resistant tile base for wet areas. They are XPS foam panels manufactured with a proprietary blend of synthetic polymer mortar and an alkali-resistant fiber mesh. This gives the ARDEX TLT™ Building Panels a highly rigid structure and exceptional bonding strength.

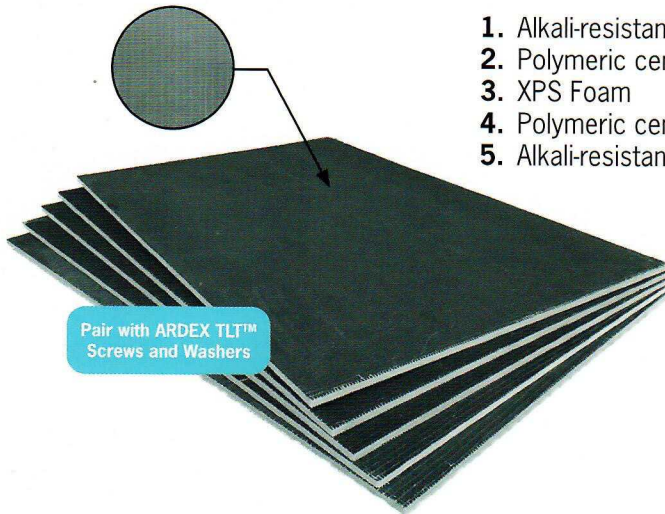

1. Alkali-resistant glass fiber mesh
2. Polymeric cement mortar
3. XPS Foam
4. Polymeric cement mortar
5. Alkali-resistant glass fiber mesh

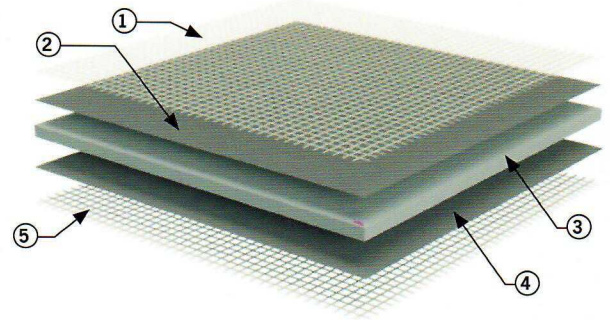


ARDEX TLT™ Curbs

The ready-to-install, pre-waterproof ARDEX TLT™ Curb is made of a lightweight foam, and is manufactured out of the same foam as the ARDEX TLT Building Panels, with a proprietary blend of synthetic polymer mortar and an alkali resistant fiber mesh, making these curbs strong and durable. Designed to integrate with ARDEX TLT™ Shower Systems, ARDEX TLT™ Curb is load-bearing and heavy-duty, and can be tiled upon to create a completely waterproof design. If a longer curb is required, combine and join multiple pieces with ARDEX TLT™ Seam Tape and ARDEX TLT™ Waterproofing Membrane. If a shorter curb is required, simply cut this curb down with a sharp razor blade knife.

- Pre-waterproof
- Lightweight
- Multiple sizes available
- Easy to cut to required size
- Ready-to-install
- Load-bearing & heavy-duty

ARDEX TLT 601	4.5" x 3" x 48"
ARDEX TLT 602	4.5" x 3" x 60"
ARDEX TLT 603	4.5" x 3" x 72"

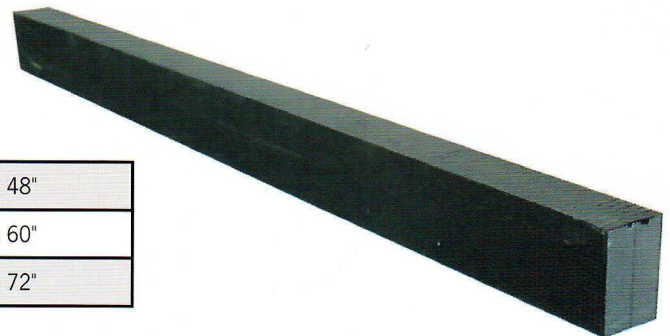


ARDEX TLT™ Niches

The ARDEX TLT™ Niche is a prefabricated open storage space that is installed within the wall of your shower. These niches are thin, ultra-lightweight, waterproof and vapor-resistant. Additionally, the niches are manufactured out of the same foam as the ARDEX TLT™ Building Panels with a proprietary blend of synthetic polymer mortar and an alkali resistant fiber mesh, making them strong and durable. Each niche comes with an adjustable shower shelf. Easy to install and ready to tile.

- Pre-waterproof
- Lightweight
- Vapor-resistant
- Multiple sizes available
- Easily move shelf up or down for custom usage
- Easy to install & ready for tile
- For use with any wall tile shower system

ARDEX TLT 501 Shower Niche	16" x 16"
ARDEX TLT 502 Shower Niche	16" x 22"
ARDEX TLT 503 Shower Niche	16" x 28"

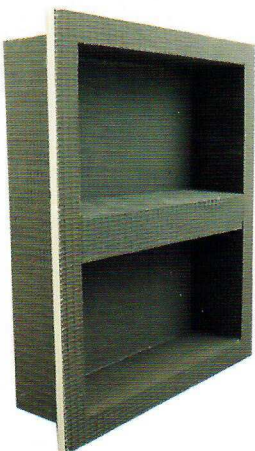



ARDEX TLT™ SHOWER SYSTEMS

Premium and high-performance shower bases, drain kits, building panels and waterproofing accessories


ARDEX TLT™ Waterproofing Accessories

Ceramic and stone tiles are durable, easy to maintain and hygienic, representing ideal surface coverings in wet areas. However, since tiles and grout are not inherently waterproof, it is essential to protect the substrate from moisture penetration with the ARDEX TLT™ Waterproofing Accessories.

These ARDEX TLT™ Waterproofing Accessories feature a modified polyethylene (PEVA) core with a non-woven polypropylene on both sides. The material is safe and does not require special disposal. This waterproof membrane is 5-mil thick and has a water vapor permeance of 0.051 perms, when tested according to ASTM E96, using Procedure E at 90% relative humidity.

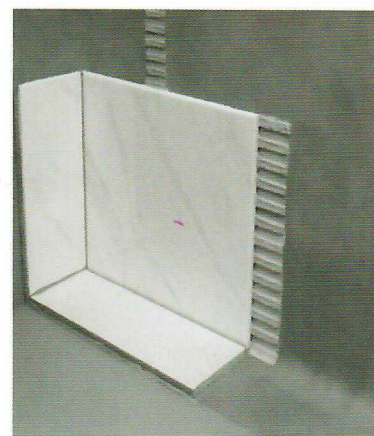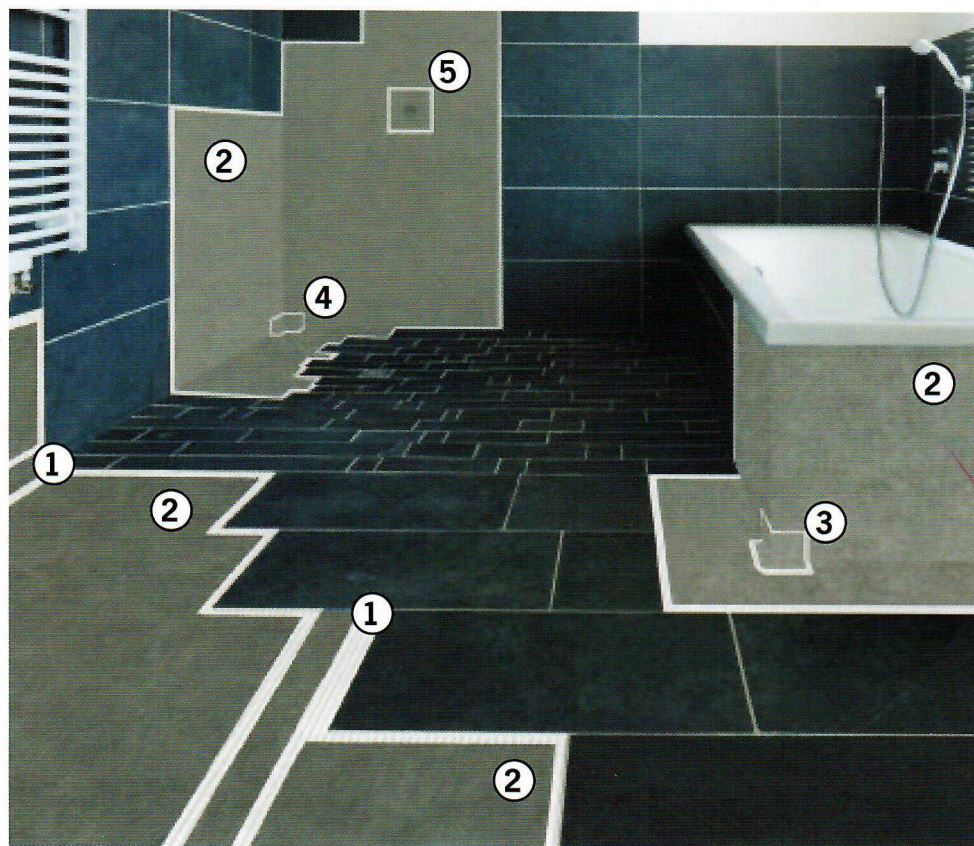


ARDEX TLT™ Waterproofing Membrane =
5 mil thick

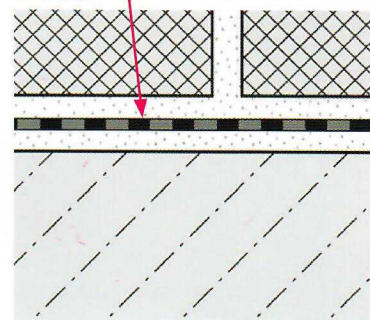

- ① ARDEX TLT™ Seam Tape
- ② ARDEX TLT™ Waterproofing Membrane
- ③ ARDEX TLT™ Outside Corner
- ④ ARDEX TLT™ Inside Corner
- ⑤ ARDEX TLT™ Mixing/Pipe Valve Seal

ARDEX TLT™ Waterproofing Accessories

ARDEX TLT™ Waterproofing Membrane is a lightweight, polyethylene membrane for use under tile and stone surfaces in showers and wet area applications. It is also suitable for chemical-resistant flooring. **ARDEX TLT™ Seam Tape** is made from the same lightweight, waterproof material as the waterproofing membrane and is for use over horizontal and vertical seams. **ARDEX TLT™ Mixing/Pipe Valve Seals** are designed to seal pipe protrusions and are for use around supply lines to shower heads, hand held wands, jets, and spray and steam heads. **ARDEX TLT™ Inside/Outside Corners** are constructed as a single piece from a seamless material that eliminates the potential of weak points in time-consuming jobsite-cutting techniques. They offer convenience and provide peace of mind knowing every corner is safe from water infiltration.

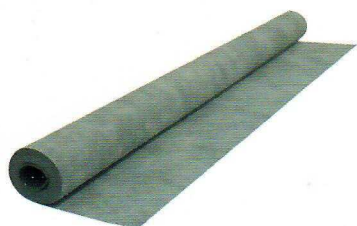


ARDEX TLT™ WATERPROOFING MEMBRANE

Width	Length	Area	Thickness
3 ft. 3 in (1 m)	32 ft. (10 m)	108 ft. ² (10 m ²)	5 mil
3 ft. 3 in (1 m)	98 ft. 5 in (30 m)	323 ft. ² (30 m ²)	5 mil




ARDEX TLT™ SEAM TAPE

Width	Length	Thickness
4.7 in (12 cm)	33 ft (10 m)	5 mil
4.7 in (12 cm)	66 ft (20 m)	5 mil
4.7 in (12 cm)	98 ft (30 m)	5 mil

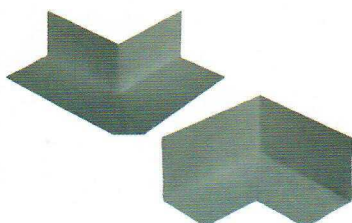

ARDEX TLT™ CORNERS

Description	Thickness	Degree
Outside Corner	5 mil	90°/135°
Inside Corner	5 mil	90°/135°

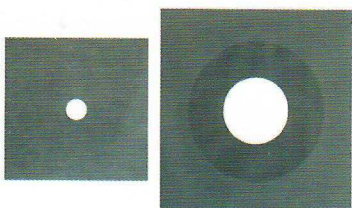

ARDEX TLT™ MIXING/PIPE VALVE SEALS

Description	Thickness
Pipe Collar	5 mil
Mixing Valve Collar	5 mil

Current Specials

**TLT 102 3' x 5' x ¼" board
\$29.95**

**TLT 103 3' x 5' x ½" board
\$31.95**

**TLT 114 4' x 5' x ½" board
\$42.95**

**TLT 101 2' x 4' x 1/8" board
\$20.95**

**All Floor Heat systems 5% off
marked price**